



DryBox™

DryBox™ desiccant dry cabinet, for the storage of filament, intelligently maintains a low relative humidity (RH).

Fully network-capable with mobile connectivity and total accessibility from any networked device, DryBox™ Intelligent Dry Storage technology enables compatibility with smart factory, Industry 4.0 operations.

DryBox™ cabinets introduces a new level of recovery performance of less than 3 minutes to provide constant access to stored parts.

Unique interior “glow lighting” provides a bright white flood of light on command for inspection of contents and intelligently alters color to correspond with **Compliant (Green)**, **Working (Yellow)**, and **Alert (Red)** status that can be monitored at a glance.

Questions: sales@nexa3d.com


 **ESSENTIUM™**
A NEXA3D Company

Standard Features



FAST RECOVERY TIME

Market-leading recovery time of less than 3 minutes provides constant access to stored filament. Exceptional, self-regulating drying technology allows assembly specialists to retrieve critical moisture-sensitive filament from dry storage as many as 10 to 12 times per hour. That's more than twice the access of competitive dry cabinets.

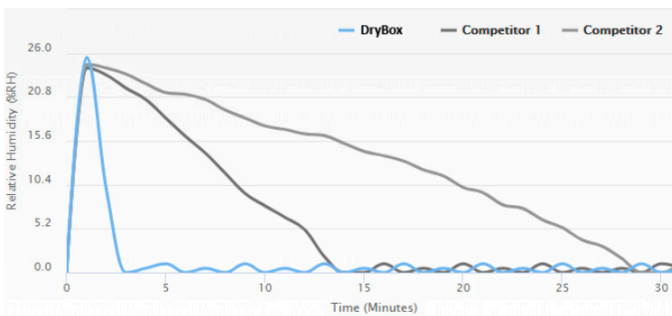

Recovery Rate Comparison



EXCEPTIONAL QUALITY

Designed and quality-built in the U.S.A.



NETWORK CAPABLE


Industry 4.0 Ready - Integrated DryBox™ network capability tracks performance and events from one or many DryBox™ storage cabinets. Access dry storage data 24/7 from any internet-enabled device.



Standard feature for all Models

INTELLIGENT LIGHT STATUS

Immediate visual confirmation of dry storage status means no more guessing about cabinet readiness. A simple glance at DryBox™ and its green, amber or red interior lighting tells operators if the unit can be accessed. It's simple, effective and smart. An optional light tower can be integrated for visual status confirmation from across the factory floor.

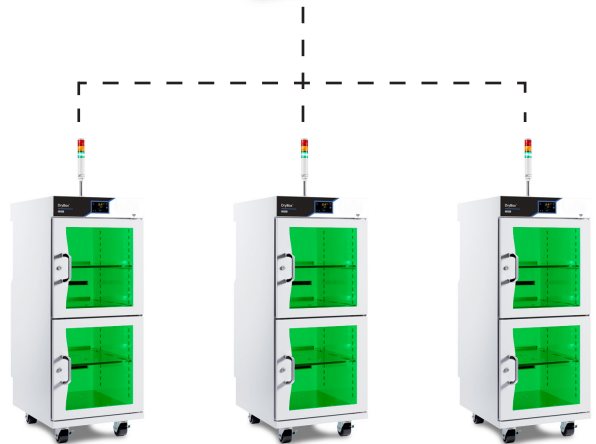

OK

In Compliance

WORKING

Intelligent recovery
in process

ALERT

Action
Required

Standard Features



4.3" TFT LCD DISPLAY

Full color HD touch screen display makes controlling DryBox™ easier than ever before.

EASY-TO-USE

Quick access to all control functions:

- Light and Mute Alarm
- Modes: DryBox™ and SmartBAKE™
- Graph: RH and Temperature Histogram

FEATURES



Restores floor life

- DryBox™ maintains safe storage thru controlled humidity during SmartBAKE™




Flexible bake cycle programming

- Manually set temperature, humidity and time



Maximizes the DryBox™ investment


- Combines storage and bake-out in a single, compact footprint

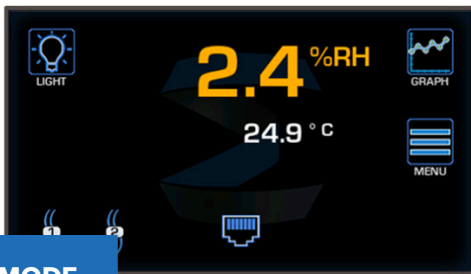


DRY MODE



BAKE MODE

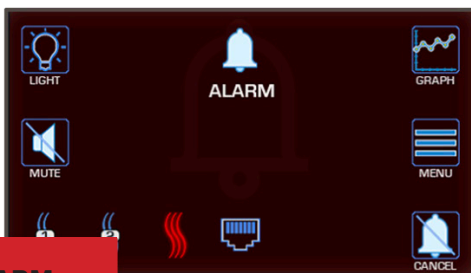

ALARM

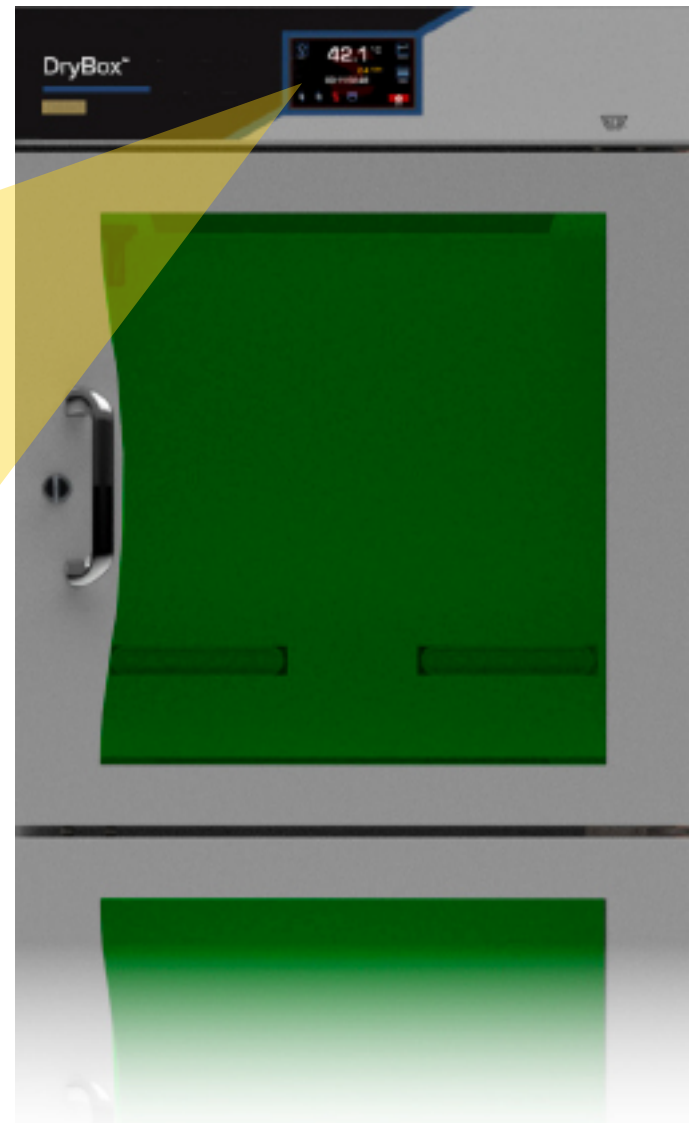

DB90-SB



DB90-SB



DB90-SB includes SmartBAKE™ which incorporates a powerful heater and insulation for baking out filament. It has storage capacity of 283 liters (10 cu ft - 2 doors, floor shelf & 2 Reel Racks) in a 45”H x 20”W x 30”D footprint and offers built-in network capability and a user friendly TFT LCD control display.

Part Number	DB90-SB-120/230
Doors	2
Door Opening	18.0”W x 17.5”H

- DryBox™ Cabinet
- SmartBAKE™ (40-60°C bake heater)
- Floor Shelf
- 2 - Reel Racks
- Users Guide
- Quick Reference Guide
- Warranty (2 Years)

Part Number	DB90-SB-120/230
Doors	2
Door Opening	18.0”W x 17.5”H




DB90-SB Technical Data & Specifications

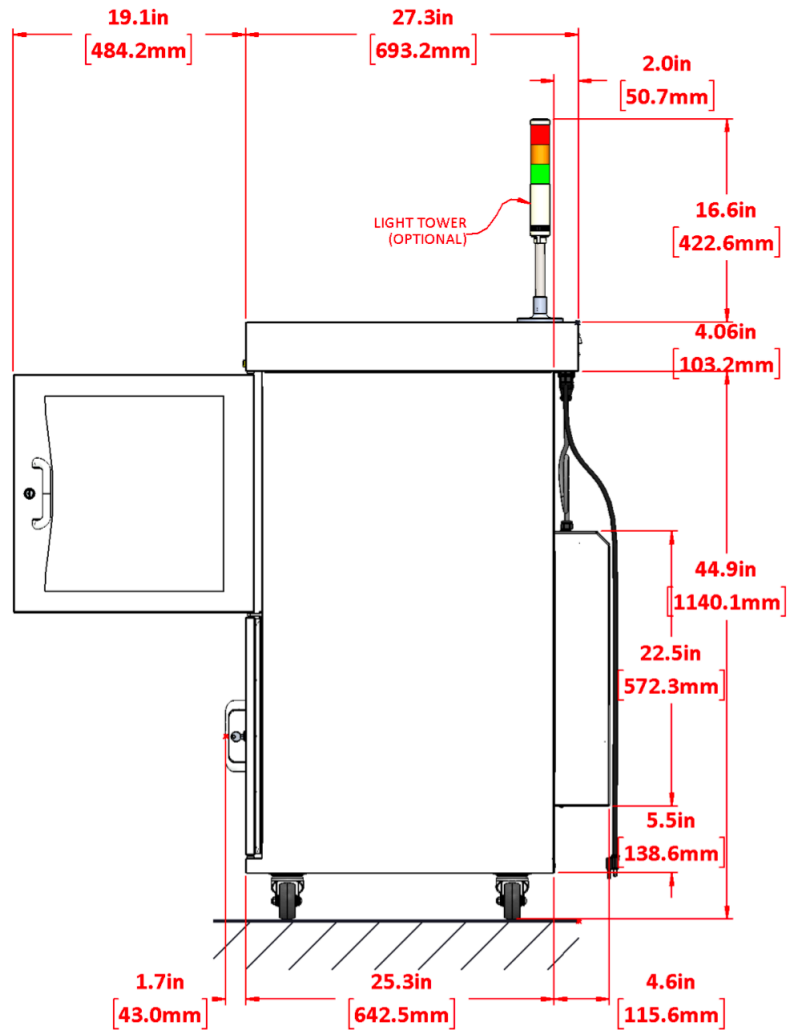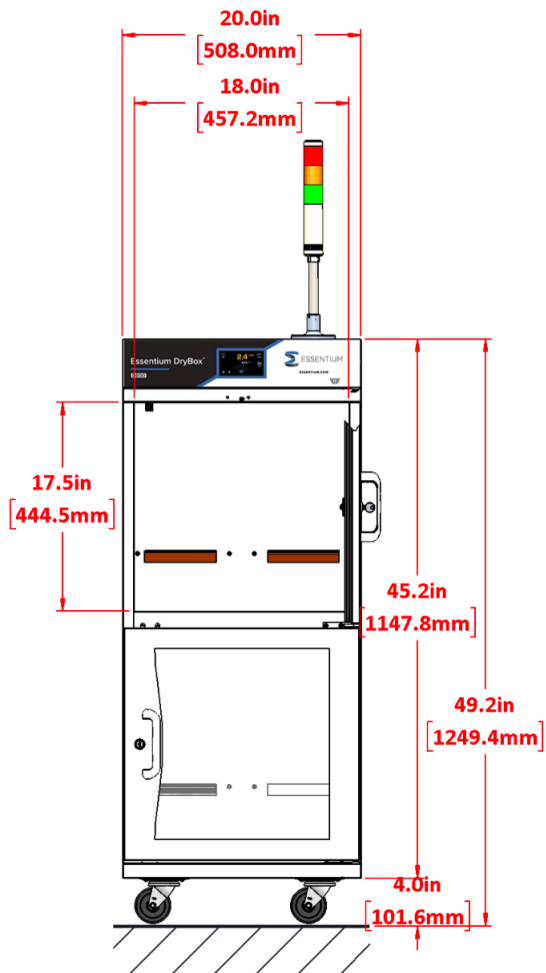

Specification	Value
External Dimensions (H x W x D)	1143 mm x 508 mm x 762 mm (45" x 20" x 30")
Internal Dimension (H x W x D)	985 mm x 479 mm x 540mm (38.8" x 18.8" x 21.2")
Internal Capacity	283 liters (10 cu ft)
Number of Shelves/Racks	1 Floor Shelf & 2 Reel Racks
Maximum Shelf Capacity	22 kg (50 lbs)
Maximum Cabinet Capacity	68 kg (150 lbs)

Specification	Value
Recovery Time	< 3 minutes
Power Consumption (Average)	10W Standby, 450W Max., 15W/Hr Ave. (1050W Peak w/ SmartBAKE Option)
Display Resolution (RH/Temp)	0.1% / 0.1°C (0.1°F)
Accuracy (RH/Temp)	± 1.8% / ± 1°C (1.8°F)
Casters	76.2 mm (3") Diameter
Cabinet Weight	< 70 kg (154 lbs)

DB90-SB Installation Requirements

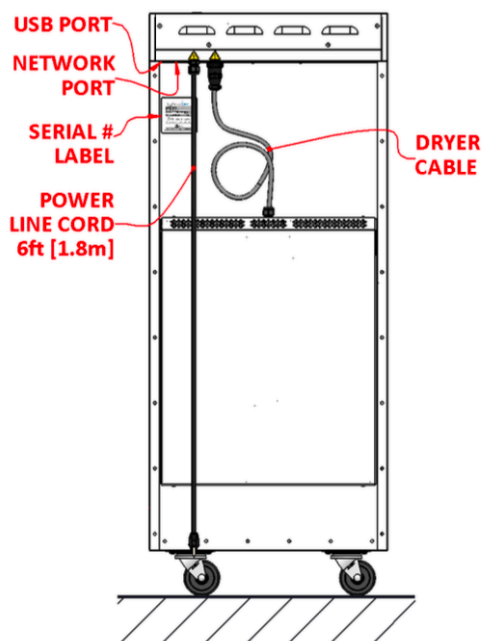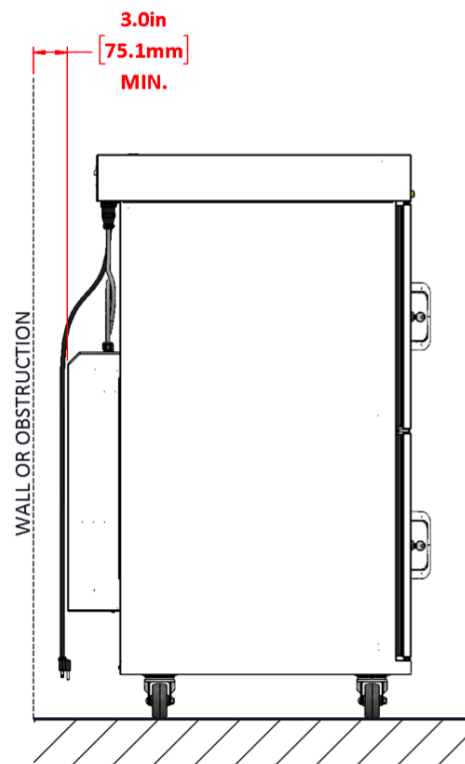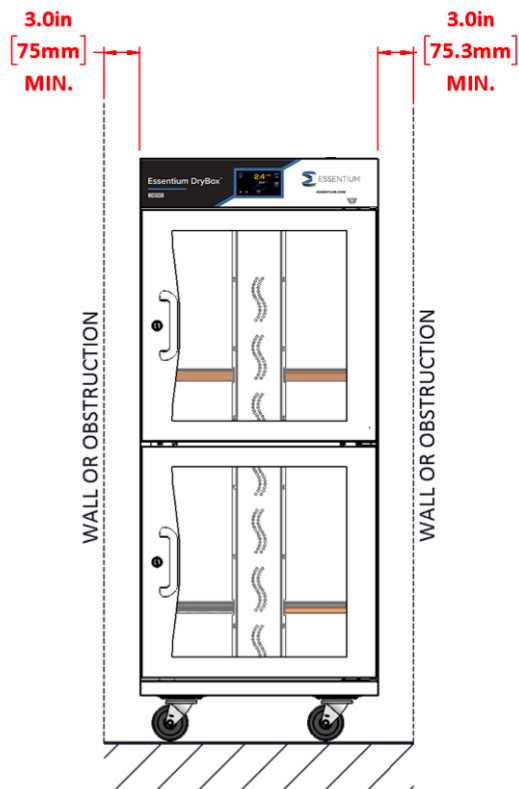

POWER SOURCE

The power requirements are listed on the cabinet serial number label. (230V 1ph, 50/60Hz or 120V 1ph 50/60Hz).

Position the unit to allow user access to the power cord for mains disconnect.

LOCATION

Allow a minimum of 75 mm (3") between the unit and any walls or obstructions which might block free air flow.

Avoid:

- Heat from radiators, ovens / production equipment
- Steam / Moisture
- Direct Sunlight
- Fast-moving air currents
- Heating/Cooling ducts



DB270





DB270

The DB270 has storage capacity of 850 liters (30 cu ft) with 2 tall doors facilitate easy accessibility for filament racks in a 70”H x 40”W x 30”D footprint and offers built-in network capability and a user friendly TFT LCD control display.

Part Number	DB270-120/230
Doors	2
Door Opening	18.0”W x 57.25”H

- DryBox™ Cabinet
- 2 - Floor Shelves
- 6 - Reel Racks
- Users Guide
- Quick Reference Guide
- Warranty (2 Years)




DB270 Technical Data & Specifications

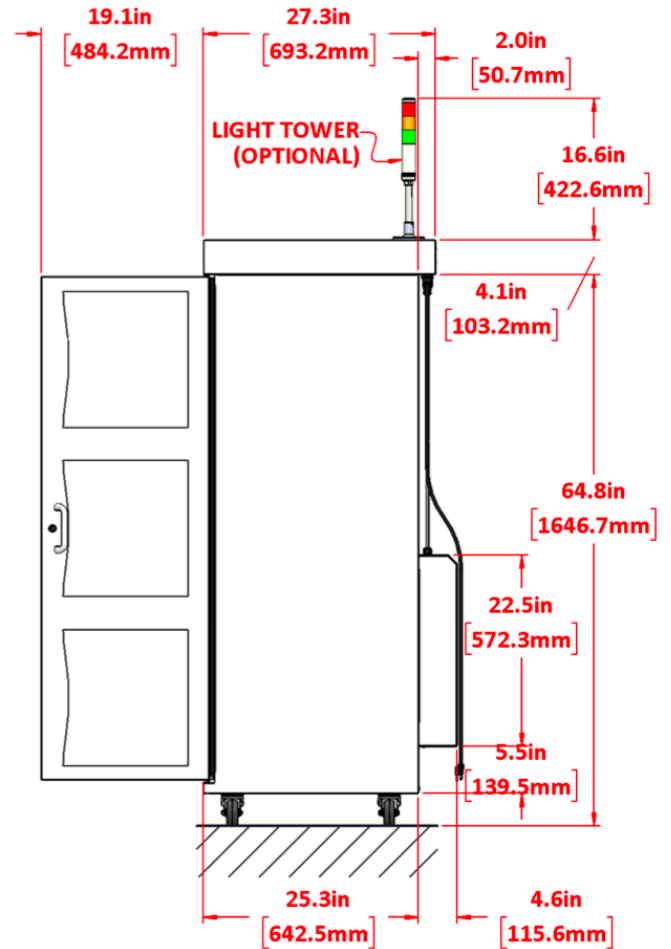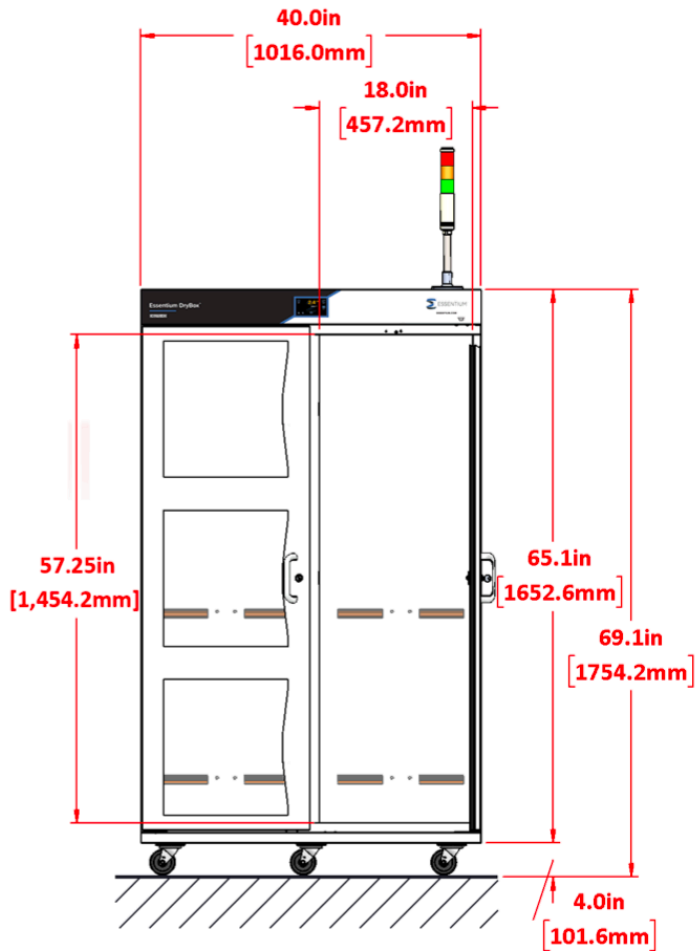

Specification	Value
External Dimensions (H x W x D)	1778mm x 1016mm x 762mm (70" x 40" x 30")
Internal Dimension (H x W x D)	1500mm x 990mm x 540mm (59" x 38.9" x 21.2")
Internal Capacity	850 liters (30 cu ft)
Number of Shelves/Racks	2 Floor Shelves & 6 Reel Racks
Maximum Shelf Capacity	22 kg (50 lbs)
Maximum Cabinet Capacity	113 kg (250 lbs)

Specification	Value
Recovery Time	< 4 minutes
Power Consumption (Average)	25W Standby, 850W Max., 30 W/Hr Average
Display Resolution (RH/Temp)	0.1% / 0.1°C (0.1°F)
Accuracy (RH/Temp)	± 1.8% / ± 1°C (1.8°F)
Casters	76.2 mm (3") Diameter
Cabinet Weight	< 163kg (360 lbs)

DB270 Installation Requirements

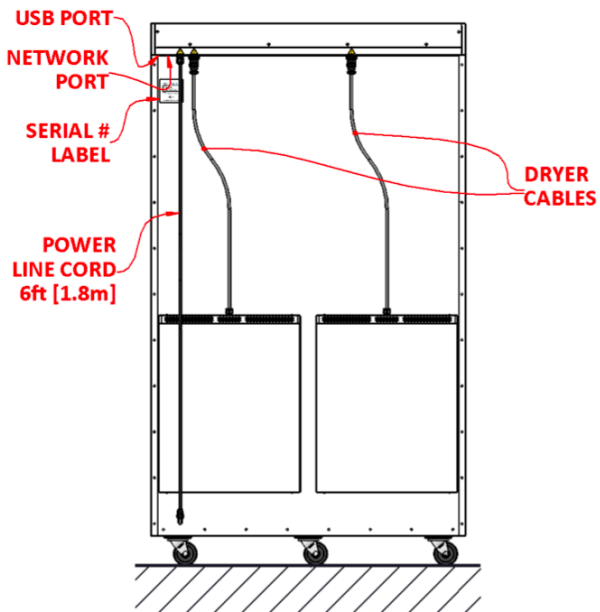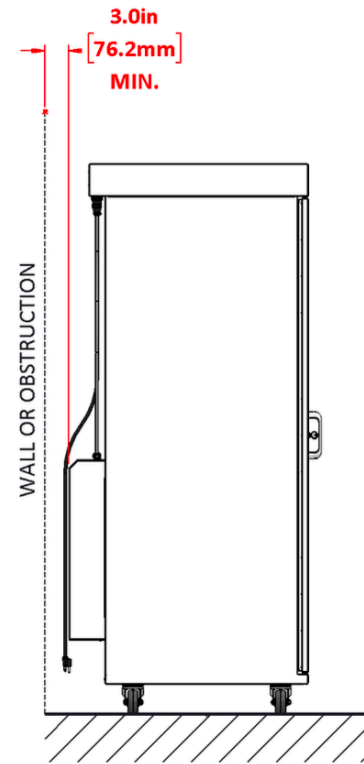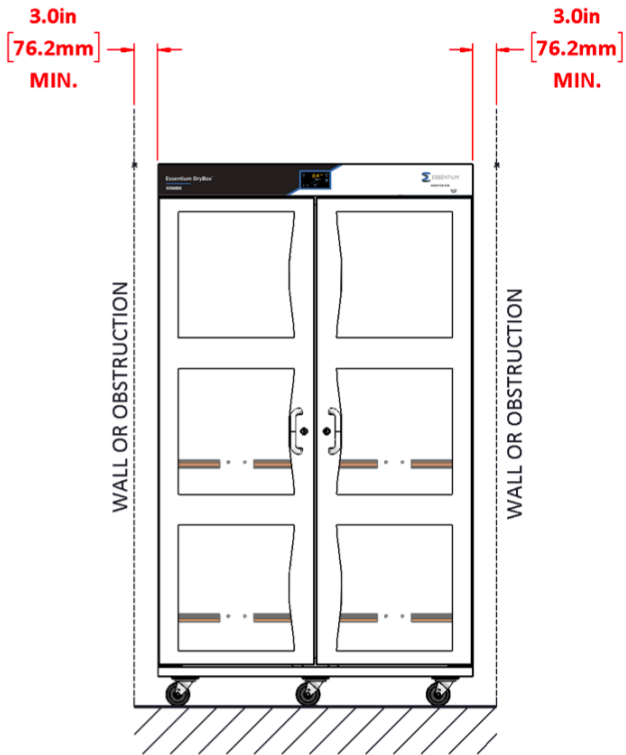

POWER SOURCE

The power requirements are listed on the cabinet serial number label. (230V 1ph, 50/60Hz or 120V 1ph 50/60Hz).

Position the unit to allow user access to the power cord for mains disconnect.

LOCATION

Allow a minimum of 75 mm (3") between the unit and any walls or obstructions which might block free air flow.


Avoid:

- Heat from radiators, ovens / production equipment
- Steam / Moisture
- Direct Sunlight
- Fast-moving air currents
- Heating/Cooling ducts



Accessories

SHELF & RACK OPTIONS

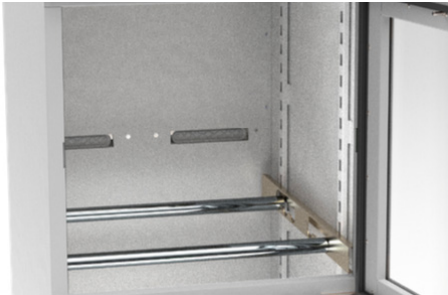

Reel Rack

- Vertical storage filament reels on one rack
- Three rows of up to 24 reels each for up to 72 reels (8mm wide tape)
- Fixed width reel supports at 48mm (1.9") inside dimension

Part Number	E60-3233-23-100
Dimension (wide x deep)	17.85" x 20.8" (424mm x 528mm)
Fits	DB90-SB, DB270

CABINET OPTIONS



Light Alarm Tower

While the cabinet comes standard with a unique interior lighting system to indicate the cabinet's status, a light alarm tower can be added for additional visibility. For situations where the cabinet status requires confirmation from across the factory floor or from the rear of the system, the light alarm tower provides a 360° view.

Part Number	E55-7379-74
Colors	Red, Yellow, Green
Fits	DB90-SB, DB270



Combination Door Locks

Secure keyless entry functionality eliminates worry about lost keys or non-authorized access.

Part Number	P57-7850-34
Dials	3 (Resettable)
Fits	DB90-SB, DB270



HEADQUARTERS

19025 N. Heatherwilde Blvd. Suite 100 Pflugerville, TX 78660

E-Mail: sales@nexa3d.com

Web: www.nexa3d.com

ASIA PACIFIC

Asia-Pacific PTE. LTD #05-50, 114 Lavender Street

Singapore 338729

EUROPE

Essentium Germany Konstanz, Germany

Essentium France Lyon, France



@Nexa3D